
Firmware upgrade tool

The C1 and C2 family camera firmware can be updated over a USB cable. CPU has a hardcoded bootloader; thus, bricking the camera is practically impossible. But unplugging the camera during flash operation is not recommended.

Update instructions:

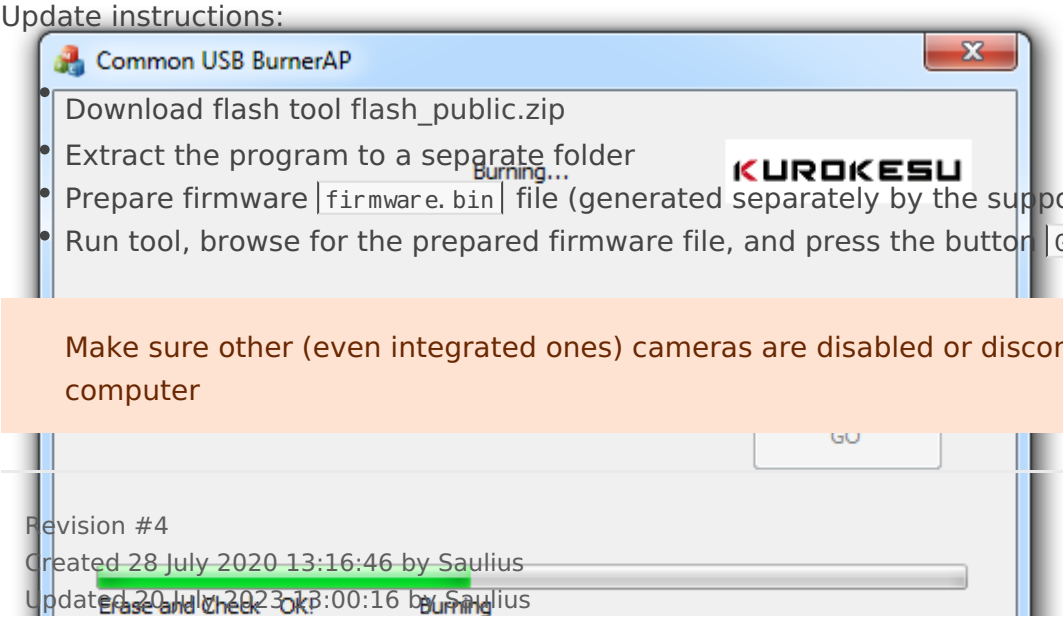

> Make sure other (even integrated ones) cameras are disabled or disconnected from computer

Revision #4
Created 28 July 2020 13:16:46 by Saulius
Updated 20 July 2023 13:00:16 by Saulius