


Raspberry Pi and AR0234 and AR0822 CSI-2 cameras - How To

Explains how to use AR0234 and AR0822 CSI-2 camera with Raspberry Pi computers

- Prepare SD card
- Raspberry Pi 4 CM Bookworm

Prepare SD card

There are other SD card prepare tools but for this article will stick with Raspberry Pi Imager. It will allow you to select Raspberry Pi device, operating system and some settings like wireless AP and SSH for headless installations. This is basics, and if something is not clear official Raspberry Pi instructions should be followed.

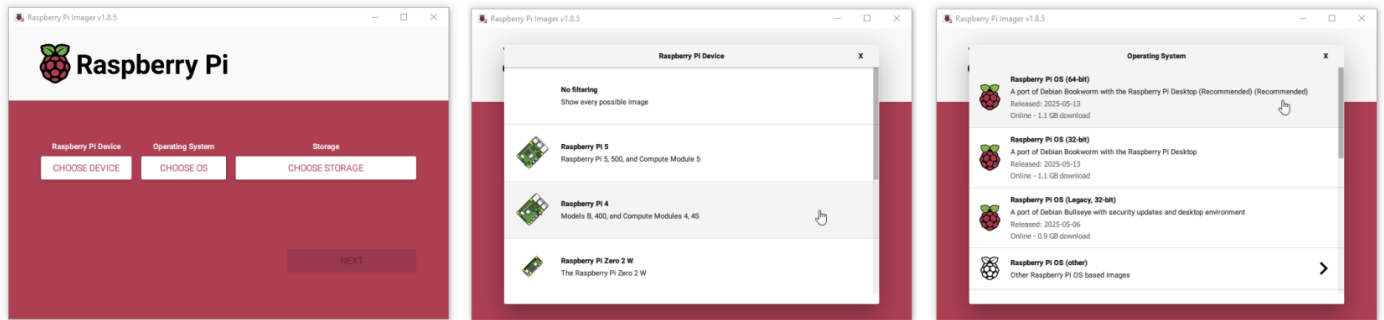


Raspberry Pi 4 CM

Bookworm

Prepare SD card

- Device: Raspberry Pi 4 (Models B, 400, and compute Modules 4, 4S)
- OS: Raspberry Pi OS (64-bit) (tested with release 2025-07-13)

Connect CSI2 camera

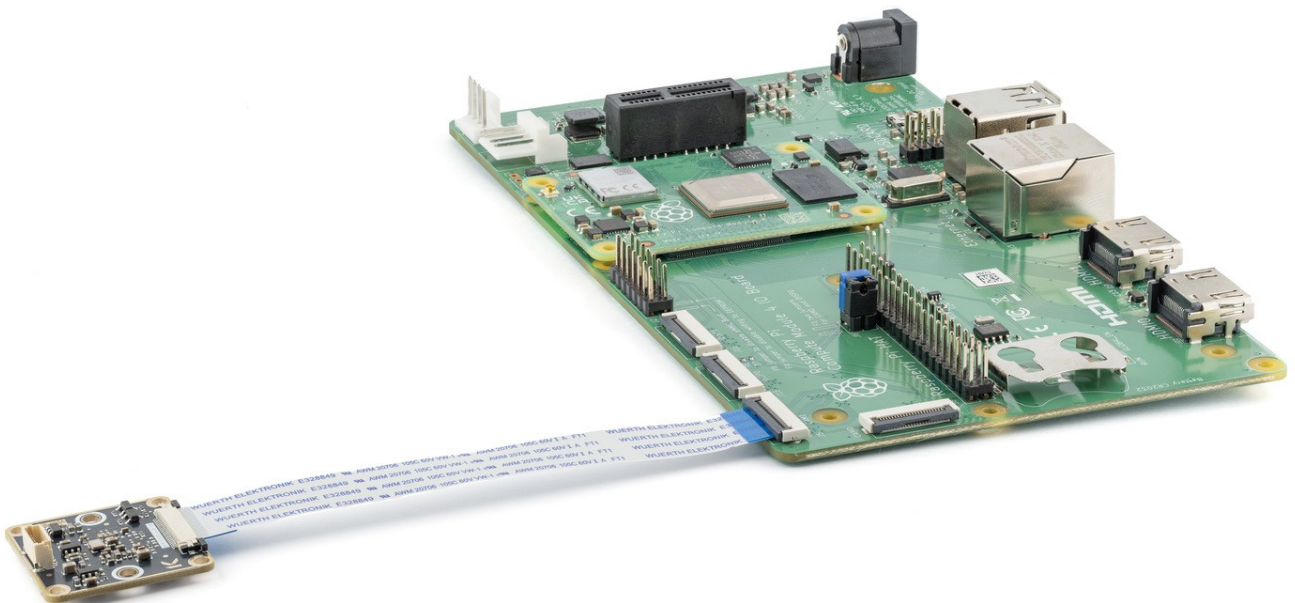

In this picture camera is connected to cam1 port.

OS Prepare

Login to your Raspberry device and update it first.

```
sudo apt update  
sudo apt upgrade -y
```

AR0234

Camera 234x-CSI-M12x

Install AR0234 kernel driver, follow instructions on [github](#). This will take some time.

Edit config file:

```
sudo nano /boot/firmware/config.txt
# camera_auto_detect=1 --- Find camera_auto_detect=1 and comment it out.

# Paste these lines at the end of the config file
dtoverlay=ar0234,cam1
camera_auto_detect=0
```

Reboot

Test camera

Check if camera is detected

```
rpigam-hello --list-cameras

Available cameras
-----
0 : ar0234 [1920x1200 10-bit GRBG] (/base/soc/i2c0mux/i2c@1/ar0234@10)
    Modes: 'SGRBG10_CSI2P' : 1280x800 [90.11 fps - (314, 190)/1280x800
crop]
                                1920x1200 [60.47 fps - (0, 0)/1920x1200 crop]
    'SGRBG8' : 1280x800 [90.11 fps - (314, 190)/1280x800 crop]
                                1920x1200 [60.47 fps - (0, 0)/1920x1200 crop]
```

Capture picture to /tmp/test.jpg

```
rpigam-jpeg -o /tmp/test.jpg -n

[0:01:49.868191487] [1657] INFO Camera camera_manager.cpp:326 libcamera v0.0.0+5529-1565507d
```

```
[0:01:49.909305340] [1658] WARN RPiSdn sdn.cpp:40 Using legacy SDN tuning - please consider
moving SDN inside rpi.denoise
[0:01:49.911981503] [1658] INFO RPI vc4.cpp:447 Registered camera
/base/soc/i2c0mux/i2c@1/ar0234@10 to Unicam device /dev/media3 and ISP device /dev/media1
[0:01:49.912148873] [1658] INFO RPI pipeline_base.cpp:1121 Using configuration file
'/usr/local/share/libcamera/pipeline/rpi/vc4/rpi_apps.yaml'
Mode selection for 960:600:12:P
  SGRBG10_CSI2P,1280x800/0 - Score: 1130
  SGRBG10_CSI2P,1920x1200/0 - Score: 1390
  SGRBG8,1280x800/0 - Score: 2130
  SGRBG8,1920x1200/0 - Score: 2390
Stream configuration adjusted
[0:01:49.914289833] [1657] INFO Camera camera.cpp:1205 configuring streams: (0) 960x600-
YUV420 (1) 1280x800-SGRBG10_CSI2P
[0:01:49.914856314] [1658] INFO RPI vc4.cpp:622 Sensor: /base/soc/i2c0mux/i2c@1/ar0234@10 -
Selected sensor format: 1280x800-SGRBG10_1X10 - Selected unicam format: 1280x800-pgAA
Mode selection for 1920:1200:12:P
  SGRBG10_CSI2P,1280x800/0 - Score: 3080
  SGRBG10_CSI2P,1920x1200/0 - Score: 1000
  SGRBG8,1280x800/0 - Score: 4080
  SGRBG8,1920x1200/0 - Score: 2000
Stream configuration adjusted
[0:01:55.234584045] [1657] INFO Camera camera.cpp:1205 configuring streams: (0) 1920x1200-
YUV420 (1) 1920x1200-SGRBG10_CSI2P
[0:01:55.238675782] [1658] INFO RPI vc4.cpp:622 Sensor: /base/soc/i2c0mux/i2c@1/ar0234@10 -
Selected sensor format: 1920x1200-SGRBG10_1X10 - Selected unicam format: 1920x1200-pgAA
Still capture image received
```

AR0822

Camera 822x-CSI-M12x

Install AR0822 kernel driver, follow instructions on [github](#). This will take some time.

Edit config file:

```
sudo nano /boot/firmware/config.txt
# camera_auto_detect=1 --- Find camera_auto_detect=1 and comment it out.
```

```
# Paste these lines at the end of the config file
dtoverlay=ar0822,cam1
camera_auto_detect=0
```

Reboot

Test camera

Check if camera is detected

```
rpicam-hello --list-cameras

Available cameras
-----
0 : ar0822 [3840x2160 12-bit GRBG] (/base/soc/i2c0mux/i2c@1/ar0822@10)
    Modes: ' SGRBG10_CSI2P' : 1920x1080 [59.96 fps - (0, 0)/3840x2160
crop]
                                3840x2160 [41.11 fps - (0, 0)/3840x2160 crop]
    ' SGRBG12_CSI2P' : 1920x1080 [59.97 fps - (0, 0)/3840x2160
crop]
                                3840x2160 [34.79 fps - (0, 0)/3840x2160 crop]
```

Capture picture to /tmp/test.jpg

```
rpicam-jpeg -o /tmp/test.jpg -n

[0:00:59.855859555] [1653] INFO Camera camera_manager.cpp:326 libcamera v0.0.0+5543-710ba35b
[0:00:59.886255555] [1654] WARN RPiSdn sdn.cpp:40 Using legacy SDN tuning - please consider
moving SDN inside rpi.denoise
[0:00:59.886959036] [1654] WARN RPiAlsc alsc.cpp:171 no luminance table - assume unity
everywhere
[0:00:59.888168759] [1654] INFO RPI vc4.cpp:447 Registered camera
/base/soc/i2c0mux/i2c@1/ar0822@10 to Unicam device /dev/media1 and ISP device /dev/media2
[0:00:59.888231999] [1654] INFO RPI pipeline_base.cpp:1121 Using configuration file
'/usr/local/share/libcamera/pipeline/rpi/vc4/rpi_apps.yaml'
Mode selection for 1920:1080:12:P
    SGRBG10_CSI2P,1920x1080/0 - Score: 1000
    SGRBG10_CSI2P,3840x2160/0 - Score: 1750
    SGRBG12_CSI2P,1920x1080/0 - Score: 0
```

SGRBG12_CSI2P, 3840x2160/0 - Score: 750

Stream configuration adjusted

[0:01:00.144875759] [1653] INFO Camera camera.cpp:1205 configuring streams: (0) 1920x1080-YUV420 (1) 1920x1080-SGRBG12_CSI2P

[0:01:00.145326036] [1654] INFO RPI vc4.cpp:622 Sensor: /base/soc/i2c0mux/i2c@1/ar0822@10 - Selected sensor format: 1920x1080-SGRBG12_1X12 - Selected unicam format: 1920x1080-pgCC

[0:01:00.269357907] [1654] INFO V4L2 v4l2_videodevice.cpp:1801 /dev/video0[13:cap]: Zero sequence expected for first frame (got 1)

[0:01:00.602825018] [1654] INFO V4L2 v4l2_videodevice.cpp:1801 /dev/video1[14:cap]: Zero sequence expected for first frame (got 11)

Mode selection for 3840:2160:12:P

SGRBG10_CSI2P, 1920x1080/0 - Score: 7000

SGRBG10_CSI2P, 3840x2160/0 - Score: 1000

SGRBG12_CSI2P, 1920x1080/0 - Score: 6000

SGRBG12_CSI2P, 3840x2160/0 - Score: 0

Stream configuration adjusted

[0:01:05.274603885] [1653] INFO Camera camera.cpp:1205 configuring streams: (0) 3840x2160-YUV420 (1) 3840x2160-SGRBG12_CSI2P

[0:01:05.282028681] [1654] INFO RPI vc4.cpp:622 Sensor: /base/soc/i2c0mux/i2c@1/ar0822@10 - Selected sensor format: 3840x2160-SGRBG12_1X12 - Selected unicam format: 3840x2160-pgCC

Still capture image received