


Raspberry Pi Zero 2 W

Prepare SD card

- Device: Raspberry Pi Zero 2 W
- OS: Raspberry Pi OS (64-bit) (tested with release 2025-05-13)

Connect CSI2 camera

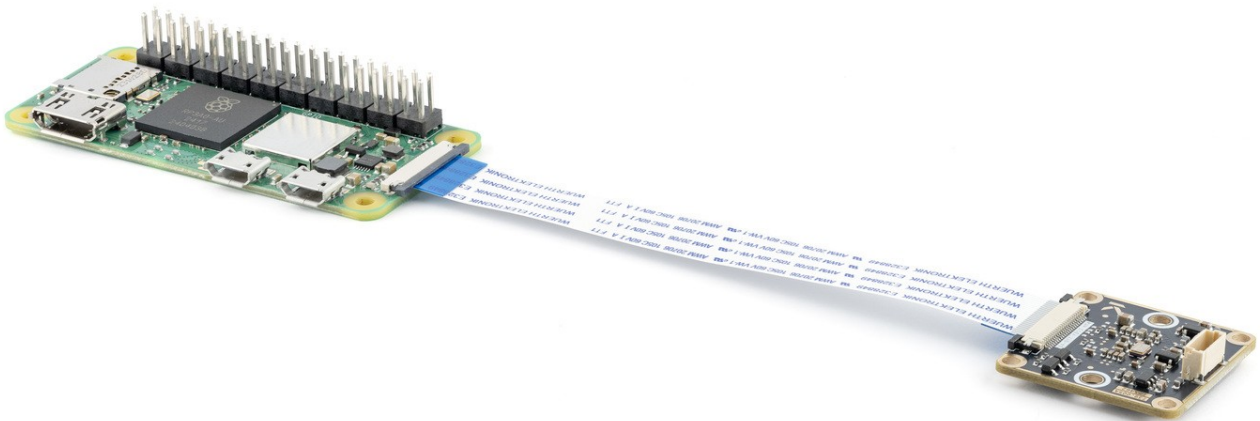

OS Prepare

Login to your Raspberry device and update it first.

```
sudo apt update  
sudo apt upgrade -y
```

This is important, when tested current OS without updating camera did not work. Will take a while to complete.

IMX462

Camera 462x-CSI-M12x

Setup camera

Edit config file:

```
sudo nano /boot/firmware/config.txt
# camera_auto_detect=1 --- Find camera_auto_detect=1 and comment it out.

# Paste these lines at the end of the config file
dtoverlay=imx462,clock-frequency=37125000
camera_auto_detect=0
```

Reboot

Test camera

Check if camera is detected

```
libcamera-hello --list-cameras

Available cameras
-----
0 : imx462 [1920x1080 12-bit RGGB] (/base/soc/i2c0mux/i2c@1/imx290@1a)
    Modes: 'SRGGB10_CSI2P' : 1280x720 [60.00 fps - (320, 180)/1280x720
crop]
                                1920x1080 [60.00 fps - (0, 0)/1920x1080 crop]
    'SRGGB12_CSI2P' : 1280x720 [60.00 fps - (320, 180)/1280x720
crop]
                                1920x1080 [60.00 fps - (0, 0)/1920x1080 crop]
```

Capture picture to /tmp/test.jpg

```
libcamera-jpeg -o /tmp/test.jpg -n

[0:00:52.859887270] [1022] INFO Camera camera_manager.cpp:326 libcamera v0.5.0+59-d83ff0a4
[0:00:53.151726905] [1073] WARN RPISdn sdn.cpp:40 Using legacy SDN tuning - please consider
moving SDN inside rpi.denoise
[0:00:53.153496072] [1073] WARN CameraSensor camera_sensor_legacy.cpp:501 'imx462 10-001a':
No sensor delays found in static properties. Assuming unverified defaults.
[0:00:53.155367635] [1073] INFO RPI vc4.cpp:447 Registered camera
/base/soc/i2c0mux/i2c@1/imx290@1a to Unicam device /dev/media3 and ISP device /dev/media0
```

```
[0:00:53.155573103] [1073] INFO RPI pipeline_base.cpp:1121 Using configuration file
'/usr/share/libcamera/pipeline/rpi/vc4/rpi_apps.yaml'
Mode selection for 960:540:12:P
  SRGGB10_CSI2P,1280x720/0 - Score: 1125
  SRGGB10_CSI2P,1920x1080/0 - Score: 1375
  SRGGB12_CSI2P,1280x720/0 - Score: 125
  SRGGB12_CSI2P,1920x1080/0 - Score: 375
Stream configuration adjusted
[0:00:53.169940083] [1022] INFO Camera camera.cpp:1205 configuring streams: (0) 960x540-
YUV420 (1) 1280x720-SRGGB12_CSI2P
[0:00:53.170743937] [1073] INFO RPI vc4.cpp:622 Sensor: /base/soc/i2c0mux/i2c@1/imx290@1a -
Selected sensor format: 1280x720-SRGGB12_1X12 - Selected unicam format: 1280x720-pRCC
Mode selection for 1920:1080:12:P
  SRGGB10_CSI2P,1280x720/0 - Score: 3000
  SRGGB10_CSI2P,1920x1080/0 - Score: 1000
  SRGGB12_CSI2P,1280x720/0 - Score: 2000
  SRGGB12_CSI2P,1920x1080/0 - Score: 0
Stream configuration adjusted
[0:00:58.453761956] [1022] INFO Camera camera.cpp:1205 configuring streams: (0) 1920x1080-
YUV420 (1) 1920x1080-SRGGB12_CSI2P
[0:00:58.457460706] [1073] INFO RPI vc4.cpp:622 Sensor: /base/soc/i2c0mux/i2c@1/imx290@1a -
Selected sensor format: 1920x1080-SRGGB12_1X12 - Selected unicam format: 1920x1080-pRCC
Still capture image received
```

Revision #6

Created 15 June 2025 18:43:22 by Saulius

Updated 15 June 2025 19:40:38 by Saulius