

Overview

Kurokesu industrial USB cameras with Sony Exmo R Starvis IMX290 sensors and internal h.264/MJPEG/YUYV codec is suitable for a wide range of target applications and use cases. Stable and reliable web cameras operate on most modern operating systems (Windows, OSX, Linux, Android) designed to solve vision problems.

Target applications and use cases

- Remote operated and autonomous vehicles (low latency, low bandwidth streaming, wide range temperature operation -55°C~+85°C)
- Machine vision applications (full manual or auto controls, interchangeable CS or M12 lenses)
- Teleconferencing and virtual meetings (multicamera setup, interchangeable lenses for different view angles)
- Remote teaching/learning (multicamera setup, interchangeable lenses for wide, tele, or close-up scenes)
- Complex scientific equipment (internal process inspection and tracking)

Customers

- Universities and schools (students and teachers can use as teaching equipment or remote learning tool)
- Machine vision developers and researchers (suitable for RND and final product installation)
- Robot system developers and researchers (suitable for RND and final product installation)
- Vloggers, Gamers (recording video from multiple angles in low light)


Long term availability

We produce our cameras until there is demand and we can buy the components. Even if a product is marked on our web as obsolete, it can be produced on demand when the minimum quantity is met.

Modifications

Camera model	Lens mount	Microphones	Connector	Colors	Note
C2_USBC	CS	No	USB-C	RGB	Boxed camera
C2_USBC_MIC	CS	Yes	USB-C	RGB	Boxed camera with stereo microphones

C2_BOARD_FFC_M12M12		No	FFC 6p 0.5mm	RGB	Board camera
C2_BOARD_HS_FFC_M12M12		No	FFC 6p 0.5mm	RGB	Board camera with heatsink
C2M_USBC	CS	No	USB-C	Mono	Boxed monochrome camera

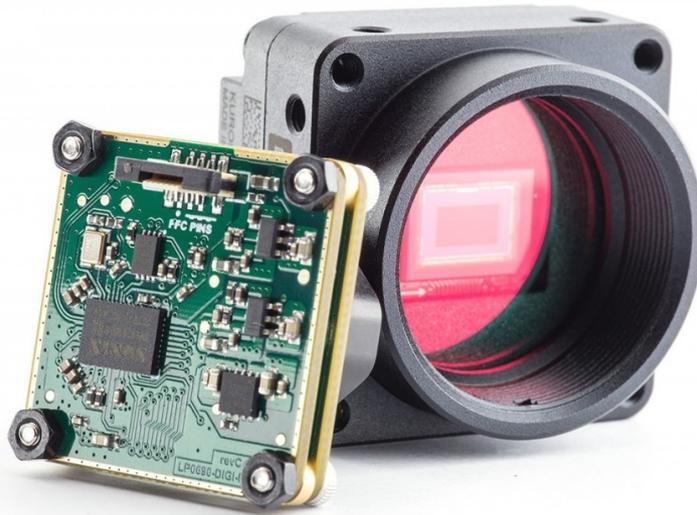

Revision #9

Created 27 May 2021 09:45:36 by Saulius

Updated 7 November 2023 19:44:05 by Saulius