


Raspberry Pi 5 Bookworm

Prepare SD card

- Device: Raspberry Pi 5 (Raspberry Pi 5, 500, and Compute Module 5)
- OS: Raspberry Pi OS (64-bit) (tested with release 2025-05-13)

Connect CSI2 camera

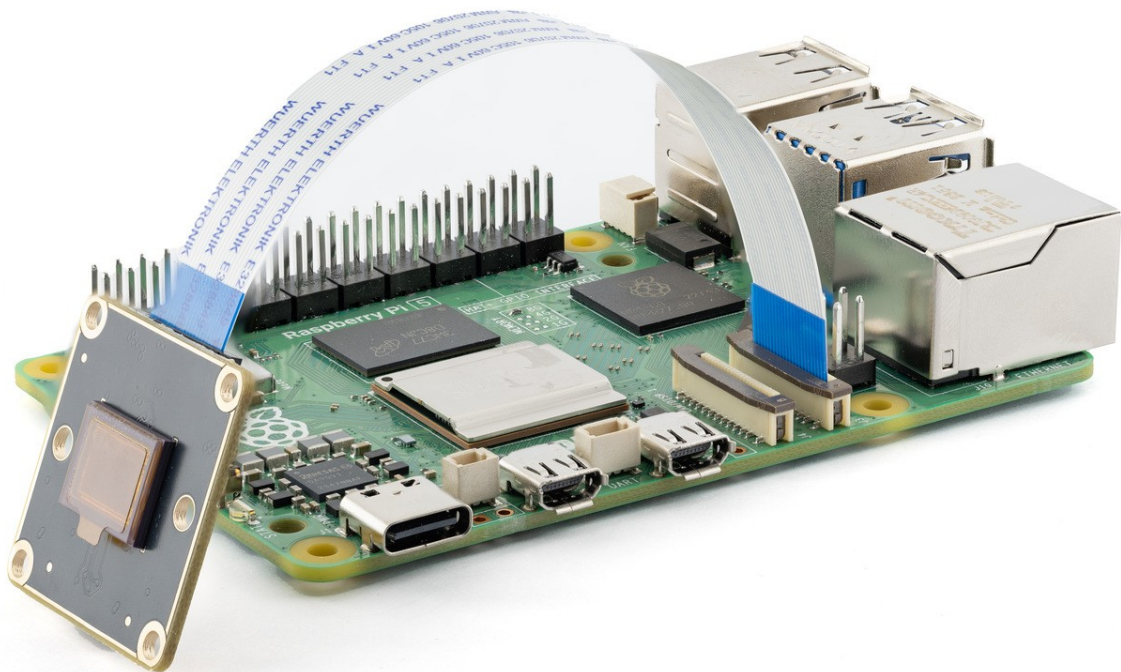

OS Prepare

Login to your Raspberry device and update it first.

```
sudo apt update  
sudo apt upgrade -y
```

IMX462

Camera 462x-CSI-M12x

Setup camera

Edit config file:

```
sudo nano /boot/firmware/config.txt
# camera_auto_detect=1 --- Find camera_auto_detect=1 and comment it out.

# Paste these lines at the end of the config file
dtoverlay=imx462,cam0,clock-frequency=37125000
camera_auto_detect=0
```

Reboot

Test camera

Check if camera is detected

```
libcamera-hello --list-cameras

Available cameras
-----
0 : imx462 [1920x1080 12-bit RGGB] (/base/axi/pcie@1000120000/rp1/i2c@88000/imx290@1a)
    Modes: 'SRGGB10_CSI2P' : 1280x720 [60.00 fps - (320, 180)/1280x720
crop]
                                1920x1080 [60.00 fps - (0, 0)/1920x1080 crop]
    'SRGGB12_CSI2P' : 1280x720 [60.00 fps - (320, 180)/1280x720
crop]
                                1920x1080 [60.00 fps - (0, 0)/1920x1080 crop]
```

Capture picture to /tmp/test.jpg

```
libcamera-jpeg -o /tmp/test.jpg -n

[0:00:18.871385025] [1789] INFO Camera camera_manager.cpp:326 libcamera v0.5.0+59-d83ff0a4
[0:00:18.878529284] [1792] INFO RPI pisp.cpp:720 libpisp version v1.2.1 981977ff21f3 29-04-
```

2025 (14:13:50)

[0:00:18.889916414] [1792] WARN CameraSensor camera_sensor_legacy.cpp:501 'imx462 10-001a':
No sensor delays found in static properties. Assuming unverified defaults.

[0:00:18.890301599] [1792] INFO RPI pisp.cpp:1179 Registered camera
/base/axi/pcie@1000120000/rp1/i2c@88000/imx290@1a to CFE device /dev/media3 and ISP device
/dev/media0 using PiSP variant BCM2712_C0

Mode selection for 960:540:12:P

SRGGB10_CSI2P,1280x720/0 - Score: 1125

SRGGB10_CSI2P,1920x1080/0 - Score: 1375

SRGGB12_CSI2P,1280x720/0 - Score: 125

SRGGB12_CSI2P,1920x1080/0 - Score: 375

Stream configuration adjusted

[0:00:18.890887136] [1789] INFO Camera camera.cpp:1205 configuring streams: (0) 960x540-
YUV420 (1) 1280x720-RGGB_PISP_COMP1

[0:00:18.890972340] [1792] INFO RPI pisp.cpp:1483 Sensor:
/base/axi/pcie@1000120000/rp1/i2c@88000/imx290@1a - Selected sensor format: 1280x720-
SRGGB12_1X12 - Selected CFE format: 1280x720-PC1R

Mode selection for 1920:1080:12:P

SRGGB10_CSI2P,1280x720/0 - Score: 3000

SRGGB10_CSI2P,1920x1080/0 - Score: 1000

SRGGB12_CSI2P,1280x720/0 - Score: 2000

SRGGB12_CSI2P,1920x1080/0 - Score: 0

Stream configuration adjusted

[0:00:24.120965985] [1789] INFO Camera camera.cpp:1205 configuring streams: (0) 1920x1080-
YUV420 (1) 1920x1080-RGGB_PISP_COMP1

[0:00:24.124285707] [1792] INFO RPI pisp.cpp:1483 Sensor:
/base/axi/pcie@1000120000/rp1/i2c@88000/imx290@1a - Selected sensor format: 1920x1080-
SRGGB12_1X12 - Selected CFE format: 1920x1080-PC1R

Still capture image received

Revision #5

Created 15 June 2025 19:20:33 by Saulius

Updated 28 August 2025 19:26:38 by Saulius