


# D19x1\_NIR\_SCREWIN - Screw in low profile Longpass NIR 850nm filter

Low profile screw-in NIR filter is designed for CS and C-mount cameras. Filter can be used with most lenses without disassembling camera or lens.




## Dimensions

- Diameter: 25.4+/-0.1mm
- Thickness: 4.5+/-0.1mm

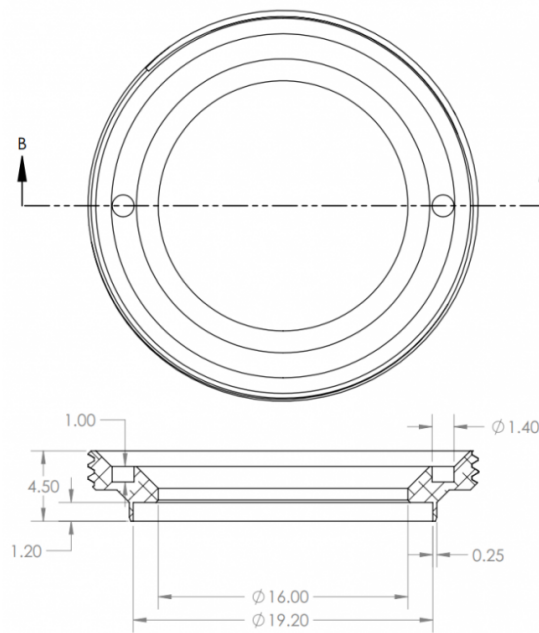

## Specifications

- Wavelength: >850nm
- Coating: AR (install reflective side face towards object)
- Transmittance(avg) > 80%@850-2200nm
- OD value > 3.5@200-800nm

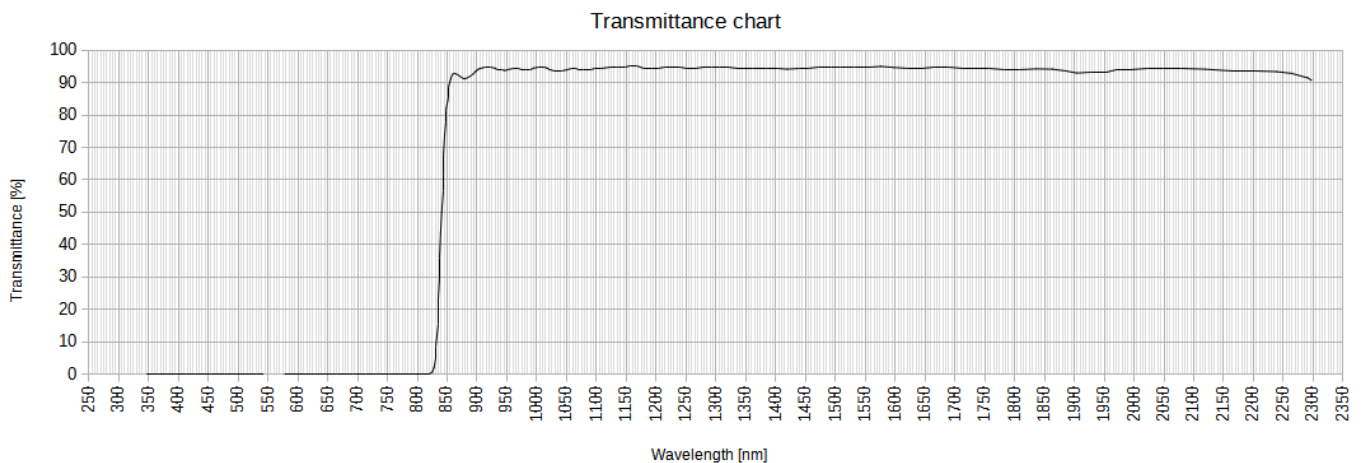

## Tool

Knippex **48 11 J1** Precision Circlip Pliers are recommended to install and remove filter.

- Tips (diameter): Ø 1.3 mm
- Size of bore: Ø 12 – 25 mm
- EAN: 4003773048527
- Dimensions: 140 x 48 x 12 mm
- Weight: 105 g



---

Revision #2

Created 15 January 2022 11:41:16 by Saulius

Updated 15 January 2022 11:47:34 by Saulius